




IN-GROUND
AUTOMATIC COVER
ROLLINSIDE



**INTEGRATION
VERSATILITY
SAFETY**


IN-GROUND
AUTOMATIC COVER
ROLLINSIDE

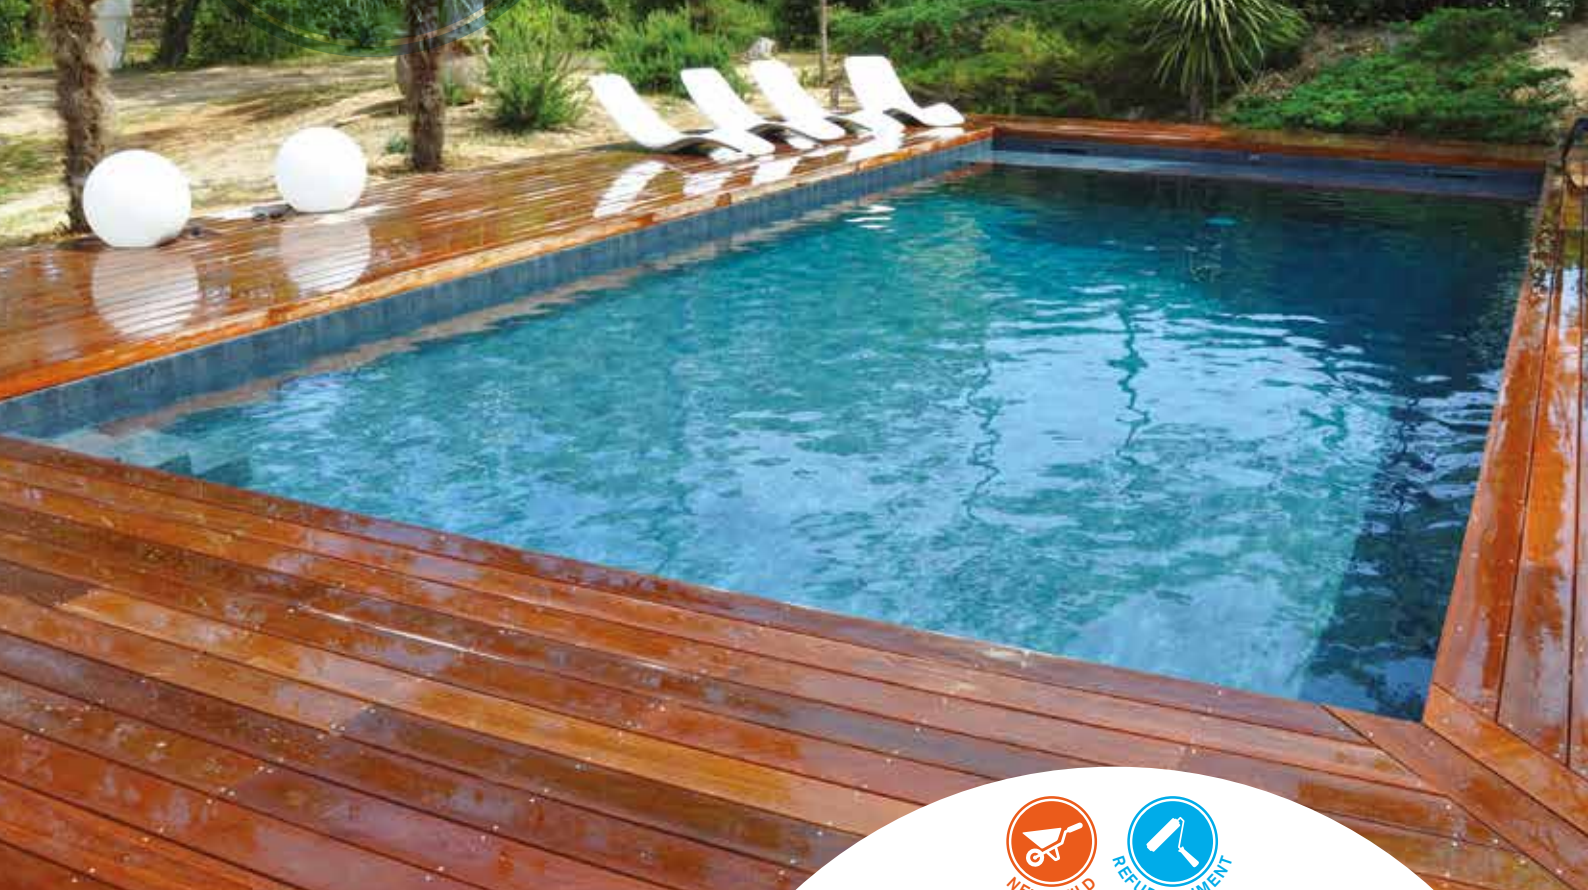

SPECIFICATIONS

For pools from 2.5 x 3 m up to 10 m width. Suitable for pools with tiling, reinforced membrane or liner.

- 1 Immersed pit with a PVC decking (white, beige, blue or grey), IPE decking or decking to be covered with reinforced membrane for perfect harmonisation with the pool or poolside covering.
- 2 2 motorisations available: in a dry pit for easier maintenance or tubed especially adapted to refurbishment. 120, 250 or 750 Nm motors depending on the pool size and depth.
Torque limiter: used to stop the opening of the cover if an abnormal strain is detected on it.
Remotely controlled by Wi-Key, the remote wireless control box.
- 3 Cover composed of opaque PVC or polycarbonate solar slats fitted with locking kits.
Slats available in several colors for perfect matching with your environment.



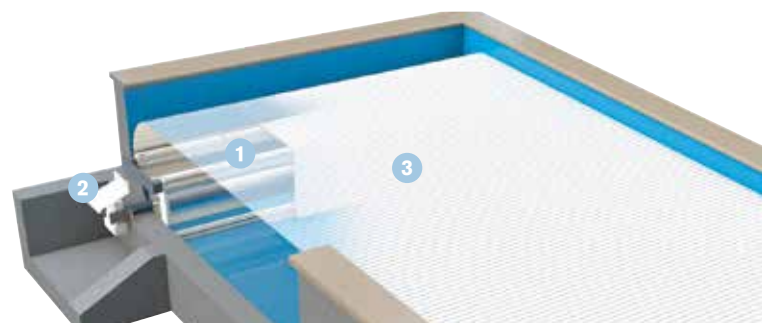


CONFIGURATIONS


A very functional concept available in 4 versions :

SINGLE SIDE HORIZONTAL DECKING :

for inclusion in the pool
bottom or in a step unit.



2 SIDES VERTICAL AND HORIZONTAL DECKING :





ROLLINSIDE IS A COVER CLEVERLY HIDDEN IN A PIT IMMERSSED UNDER THE WATER AND THEREFORE INVISIBLE PERFECTLY BUILT INTO THE POOL BOTTOM, IT MAINTAINS THE POOL'S ELEGANCE AND PURITY OF LINES WHILE GUARANTEEING OPTIMAL OPERATION AND PERFECT PROTECTION WHEN DEPLOYED.

INTEGRATION

The patented Rollinside system makes it possible to completely build the cover into the pool bottom without any visible decking around the pool. Once rolled it becomes completely invisible and leaves room for the step unit or the bench for optimum comfort and discretion. Its cover available in several colours makes it possible to harmonise its style with the pool environment.

VERSATILITY

Rollinside is perfectly adapted to new build or refurbishment projects. Its one or two side covering makes it possible to cater for all possible installation configurations. Suitable for pools with tiled, reinforced membrane or liner coverings, it is available with two type of motorisation.

ECO-RESPONSIBLE

Covering your pool with a Rollinside safety cover limits evaporation, which is the cause of drops in water levels, while maintaining the pool temperature and limiting external pollution. Available with a polycarbonate solar cover, Rollinside makes it possible to heat the water naturally and make significant energy savings.



THE WIRELESS REMOTE CONTROL BOX



- Pool opening and closure information is sent using digital wireless communications.
- No connections or cable passages.
- An aesthetic and watertight control box for indoor or outdoor installations.
- Use secured by a password and compliant with the NF P 90-308 safety standard.



Crystal/Black polycarbonate solar slats




IN-GROUND AUTOMATIC COVER ROLLINSIDE

SLATS

NEW
IVERNEA

Remember to order your **winter shield** to protect the cover from UVs and dirt.



NEW

Polycarbonate solar slats

Compliant with the NF P 90-308 standard (DEL exclusivity)

5 available colours (brown, crystal, green, blue, black)



Opaque PVC slats

Compliant with the NF P 90-308 standard

4 available colours (medium grey 2, white, beige, blue)

MAXIMUM SAFETY

An indispensable addition to DEL covers, the safety kits make it possible to guarantee the complete closure of your pool. A wide range of colours makes it possible to match the kits to your coating colour. Ask your pool professional for advice.



The purpose of DEL safety covers is not to replace the vigilance of parents and/or responsible adults which remains the essential factor for the safety of young children. DEL automatic covers are safety covers designed to prevent children under 5 years old from accessing the pool. A child can drown in under 3 minutes, no type of protective measure can replace the monitoring and vigilance of a responsible adult.

Please read carefully and keep in a safe place.

Rollinside is a pool safety cover designed to prevent children under 5 years old from accessing the pool. This product complies with the NF P 90-308 standard. It is not a substitute for common sense or personal responsibility. The purpose of this cover is not to replace the vigilance of parents and/or responsible adults which remains the essential factor for the safety of young children. A child can drown in under 3 minutes, no type of protective measure can replace the monitoring and vigilance of a responsible adult. **Guarantee:** 3 years for the motor and slats, 2 years for roller in compliance with our general sales terms and conditions. **Manufacture sheet:** For the cover to be correctly fitted to the pool it is essential to supply a drawing of the pool with measurements taken every metre. In compliance with standard NF P 90-308, the gap between the inside of the pool and the edge of the cover must be less than 70 mm. **Manoeuvre time:** 3 minutes for automatic opening or closure plus 30 seconds to lock or unlock the safety locking system. Rollinside can be opened and closed by a single person. **Use:** in all seasons. For the cover to operate correctly maintain a constant water level corresponding to normal pool filtering. It is essential to fit a water level regulator. The water level must be compliant with the instructions. **Use limitations:** The installation of an automatic DEL cover on overflow pools and/or pools with steps on the length side (removable steps on the side) is not compliant with standard NF P 90-308. In this case please use other compliant equipment. Unless otherwise specified by the manufacturer, immersion alarms are not compatible with DEL automatic covers. **Wintering:** Close the pool for winter depending on the geographic location. Without lowering the water level, close the cover in the safety position and eventually install a wintering net to protect the cover. If the water level is dropped to put the parts to insert above the water line, roll the cover and secure the pool using a safety wintering cover. **Packing list** For 5 x 10 m pools - 2 sided Rollinside. Slats: 5 packs of 5.10 x 0.25 x 0.20 m. Tube: 1 pack 4.948 x Ø 0.20 m. Beams: 3 packs of 4.06 x 0.15 x 0.15 m. Decking: 1 pallet 1.20 m x 1.00 m x 0.50 m. Motorisation kit: 1 pack of 0.62 x 0.35 x 0.35 m. Beam support: 1 pack of 0.75 x 0.25 x 0.15 m. Insertable parts: 1 pack of 1.00 x 0.20 x 0.20 m. Weight: 510 kg.

Manufacturer: DEL La Basse Croix Rouge 35530 BRECE - France. export@del.fija-group.com - www.del-piscine.fr

For more information
about your project ask your pool
professional for advice.

Distributor's stamp

 **Golden Coast**

Fishleigh Road | Roundswell Commercial Park West
Barnstaple | Devon | EX31 3UA

Phone: +44 (0) 1271 378100 | Fax: +44 (0) 1271 371699
Email: swimmer@goldenc.com | Web: www.goldenc.co