

Tagelus® Sand Filter




FEATURES

- Easy-to-use water drain for simplified service and winterising
- All internal parts are threaded for ease of maintenance
- Seamless composite construction eliminates leaks, cannot rust or corrode
- Maximum operating temperature 50°C
- Maximum working pressure 3.5 bar
- 10-year limited warranty (shell only)

Tagelus high rate sand filters have a special diffuser that creates a uniform sand bed to trap more debris without slowing the water flow, giving more effective filtration and longer times between backwashing.

The tank is made in one piece from fibreglass reinforced material for strength and to eliminate the possibility of leaks. Tagelus comes with a top mounted six-position multi-port valve with sight glass, a built in pressure gauge and a manual air relief valve.

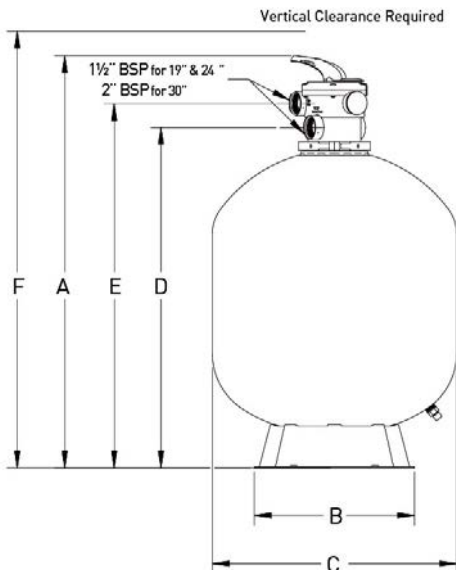

Stock Code	TAG19	TAG24	TAG30
Model	F-19T6-TAG	F-24T6-TAG	F-30T8-TAG
A (mm)	878	1009	1170
B (mm)	400	400	610
C (mm)	480	610	762
D (mm)	715	847	1026
E (mm)	774	904	1108
F (mm)	1194	1448	1664
Flow Rate (m ³ /hr)	8.5	14	22
Filter Area (m ²)	0.17	0.19	0.45
Gravel / Sand (kg)	20 / 52	40 / 108	80 / 310
Connections	1.5"	1.5"	2"



www.certikin.co.uk